


## Sloped Seats Worksheet

- List half skews in 5° increments - round off as required.
- Always include the "+" or "-" symbol.
- Half skews on the top chord are measured parallel to the top chord and half skews on the seat are measured parallel to the bottom of the seat. For joists with sloped seats, the the half skew on the top chord will often be greater than the half skew on the seat.
- If a half skew is required only on a top chord or a seat, enter the angle in the correct space and enter "NO" in the other space.

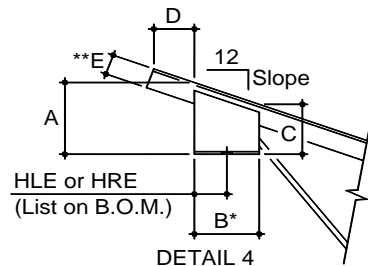

Job No.:	Sequence:	Detailer:	Checker:	Issued For:
Customer:				Date:
Job Name:		Location:		

[illegible]